

Play value

The tower is clad with timber facing made of natural larch, complete with observation slits. Inside are three floors, installed offset to one another. Those permanently installed intermediate floors create cosy rooms. The top floor can be reached via a ladder or you can climb up to the level of the balcony and enjoy the panorama. Use the ladder installed there to reach the ground again. The balcony can also be used as a connection to other play equipment e.g. with a suspension bridge. In combination with a slide, the Look-Out Tower is an attractive eye-catcher.

Fundamental characteristics

- Unique and original
- Harmonious design
- Observation slits
- Balcony

Recommended for

- School children
- Supervised play areas, such as schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar




Look-Out Tower



3.21500

Order No. 3.21500
Look-Out Tower

Safety distance 
Device dimensions 
Functional distance 

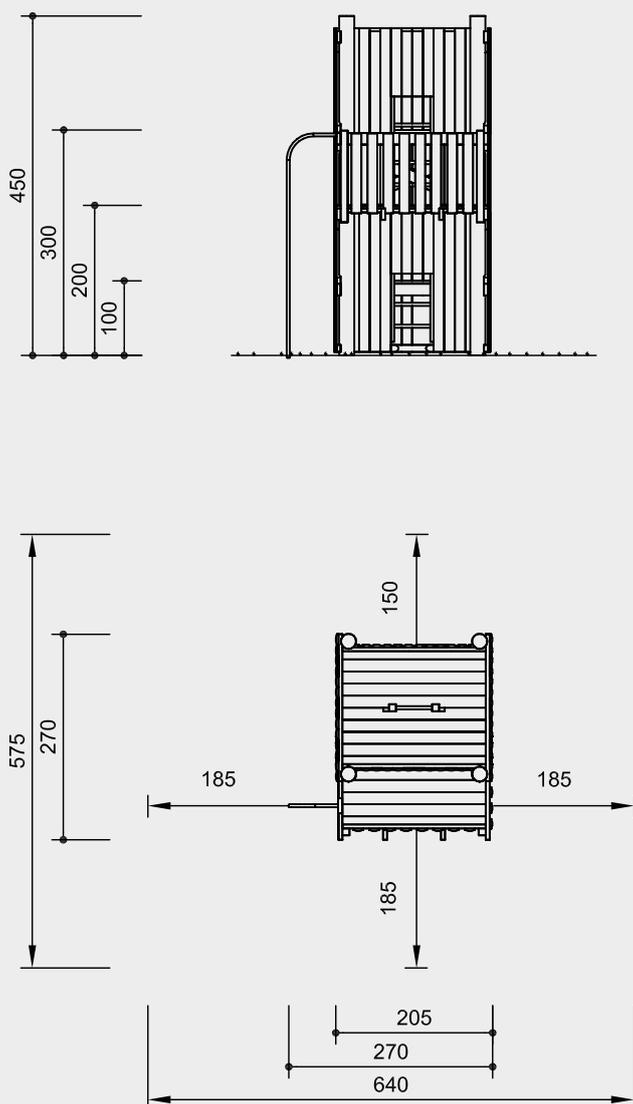

Scale 1:100

Safety check according to DIN EN 1176

Components

- 4 Side parts
- 1 Balcony balustrade
- 3 Floor halves
- 1 Balcony floor
- 1 Ladder
- 1 Firemen's pole

Installation information

Surfacing requirements corresponding to a fall height of ≤ 2.00 m (please refer to price list for more detailed information)

Foundations
4 items 60 x 60 x 60 cm
Excavation depth 80 cm
1 item 30 x 30 x 30 cm
Excavation depth 60 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



Hardwood rungs

Climbing rungs made of hardwood (ash) \varnothing 4.2 cm, milled and mortised, secured against twisting, easy to grip and not cold for children to touch



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Firemen's pole made of stainless steel, glass bead blasted

Dimensions

(small deviations possible)

Height	4.50 m
Floor heights	1.00 / 2.00 / 3.00 m
Length	2.70 m
Width	2.70 m
Weight	1200 kg



3.21500