

Play value

Our Totter Trail comprises various elements offering a variety of activities, such as climbing, balancing and going through openings. The niche-like layout also provides the children with enough space for fantasy-full role-playing games and hiding. Several little ramps, platforms, ropes and rungs invite the children to climb up to the equipment. Different play variants are possible – we will create a customised plan according to local conditions.



© Richter Spielgeräte GmbH 06/22

Fundamental characteristics

- Child-oriented dimensions according to ergonomic criteria
- The space-defining design appeals to the senses
- A large number of play offers
- Incentive for playing: cosy room, climbing, role-playing game
- Movement: climbing, balancing


Recommended for

- Children under 3 years
- Kindergarten children
- Supervised play areas, such as kindergartens, schools after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Planning information

Our Totter Trail can be put together individually. Other variants are possible on request.



**Totter Trail
Type 01**



4.03010

Order No. 4.03010
Totter Trail Type 01

Safety distance →
Device dimensions ●
Functional distance —

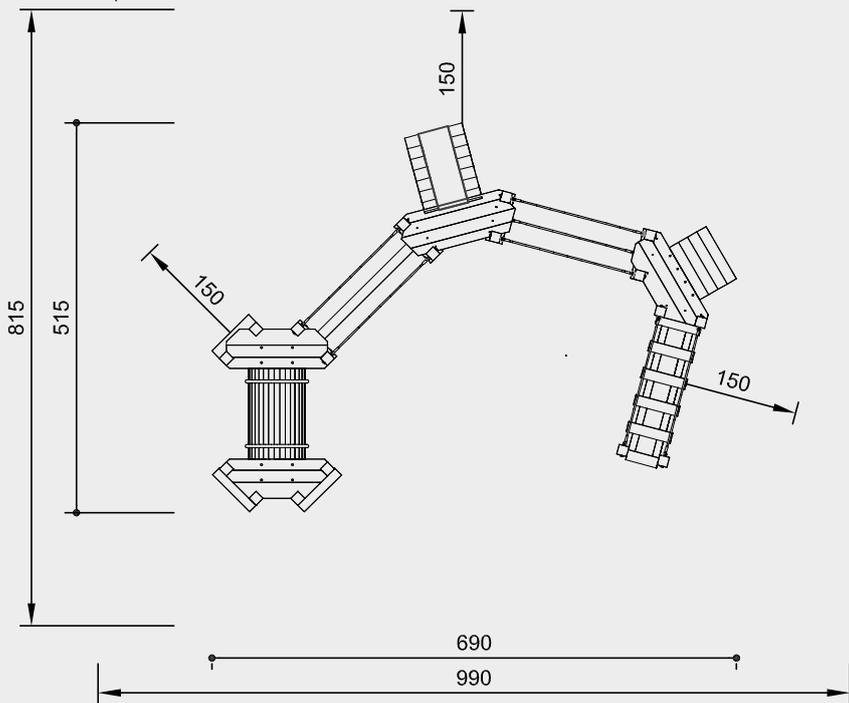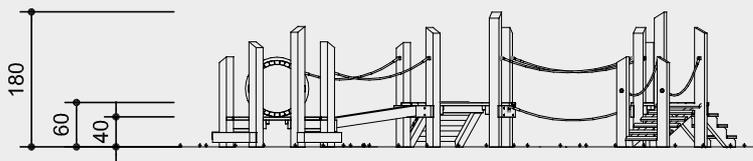

Scale 1:100

Safety check according to DIN EN 1176

Components


- 4 Floors for platform with steel feet
- 3 Stepping blocks
- 1 Crawl barrel
- 1 Balancing beam
- 1 Gap bridge
- 1 Support frame for gap bridge with steel feet
- 1 Staircase
- 1 Inclined wall with inclined stainless steel surface
- 6 Hand ropes
- 1 Balancing rope

Installation information

Surfacing requirements corresponding to a fall height of ≤ 0.60 m (please refer to price list for more detailed information)

Foundations
9 items 90 x 50 x 40 cm
Excavation depth 60 cm
1 item 90 x 30 x 20 cm
Excavation depth 40 cm
2 items 30 x 30 x 30 cm
Excavation depth 50 cm

Attention:
Exact measurements may vary; for all installation dimensions refer to current assembly instructions.
Technical changes reserved.



4.03010

Technical information

Equipment made of non-impregnated mountain larch

Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



Rope connection with joint

Close-fitting connection with joint, without dangerous openings, with sintered bush and adjustable screw connection



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Steps made of hardwood 32 mm

Stainless steel slide surface

Dimensions

(small deviations possible)

Height	1.80 m
Floor heights	0.40 / 0.60 m
Length	6.90 m
Width	5.15 m