



Play value

Once you have swung on a long pendulum, you will never let go of the dream of a really high swing. Here we have designed such a construction, which makes the feeling of freedom and lightness directly tangible, and the „dream of flying“ inherent in every human being, at least for the moment.

Fundamental characteristics

- Extra high swing frame allows for soft swinging
- Equipment height is challenging for young people
- Incentive for playing: height
- Movement: swinging

Recommended for

- School children
- Young people
- Supervised play areas, such as schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar



Order No. 7.14020 Extra High Twin Swing special

Extra High Twin Swing special
Extra High Swing special



7.14020




7.14120



Order No. 7.14020
Extra High Twin Swing special
Order No. 7.14120
Extra High Swing special

Safety distance 
 Device dimensions 
 Functional distance 

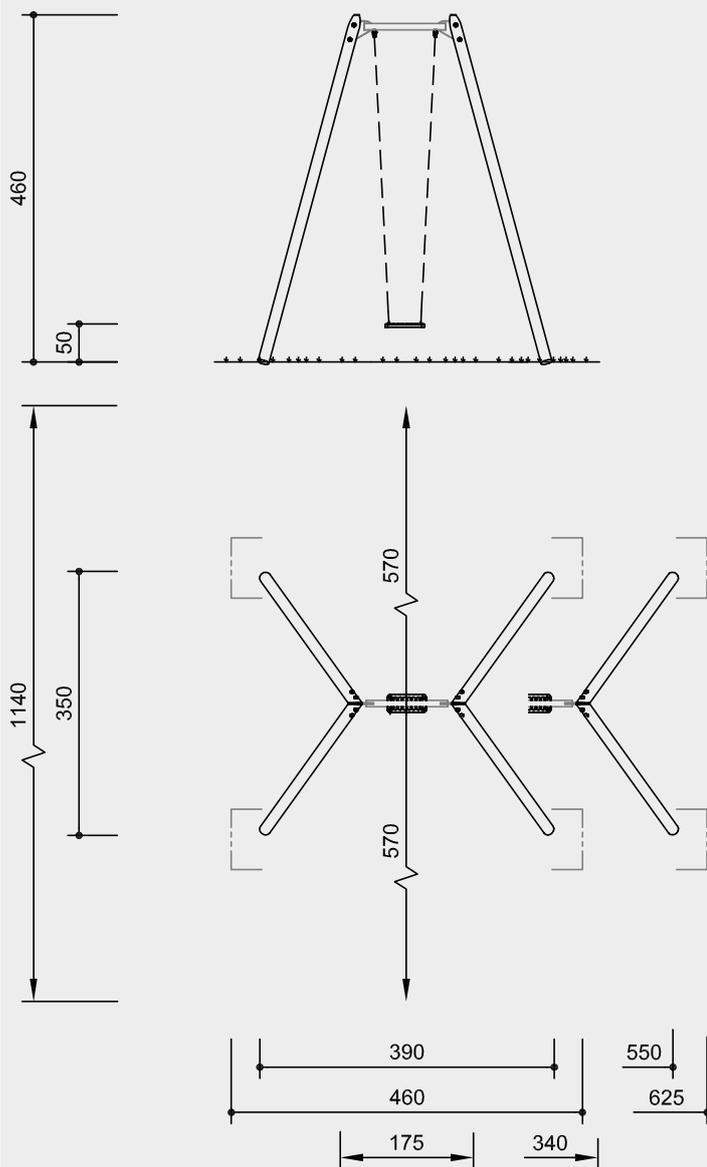

Safety check according to DIN EN 1176

Components

- Order No. 7.14020**
Extra High Twin Swing special
- 1 Swing frame with steel feet and cross beam made of steel
 - 2 Wide swing seats with chains

- Order No. 7.14120**
Extra High Swing special
- 1 Swing frame with steel feet and cross beam made of steel
 - 2 Wide swing seat with chains

Installation information

Surfacing requirements corresponding to a fall height of ≤ 3.00 m (please refer to price list for more detailed information)

Foundations
 4 items 80 x 60 x 60 cm
 Excavation depth 80 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer to current assembly instructions.
 Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Swing seat

Ergonomically shaped swing seat made of rubber with soft shock absorbing edge. Durable due to strong profiled steel insert



Swing joint

Drop-forged, hot-dip galvanised swing joint with sintered bush and integrated swivel



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Cross beam made of steel

Swing cross beam made of hot-dip galvanized steel. Optimized swing geometry with rigid corner connections, thus allowing for smaller foundations and easier foundation covering



Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Order No. 7.14020 / 7.14120

Height	4.60 m
Vertical clearance	4.45 m
Length	5.50 / 3.90 m
Width	3.50 m
Weight	500 / 270 kg



7.14020



7.14120