

Play value

The large Platform Tower is often used as the central design feature of playgrounds. With its two levels and if combined with various other pieces of playground equipment, it makes an attractive meeting place for children of all ages. The lower platform can be reached via a double ladder, climbed from the inside, which offers smaller climbers back protection. From there, the children have a variety of options, especially if suspension bridges, slides, nets and more are connected to the same level. The upper platform, which has a considerable height of 4 m, is secured by thick claddings screwed onto the structure with gaps that offer a view from a lofty height. This play area can also be reached by a double ladder and is particularly attractive if a large slide allows a swinning getaway to the ground. In this case, the slide will be installed above the extension of the lower platform in order to comply with the permitted free height of fall.

Fundamental characteristics

- Versatile opportunities for combination
- Natural wooden surface that appeals to the senses
- Incentive for playing: experiencing height, role-playing games
- Movement: climbing

Recommended for

- School children
- Supervised play areas, such as kindergartens, schools after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Special version


Platform Tower



Special version



L3.30000

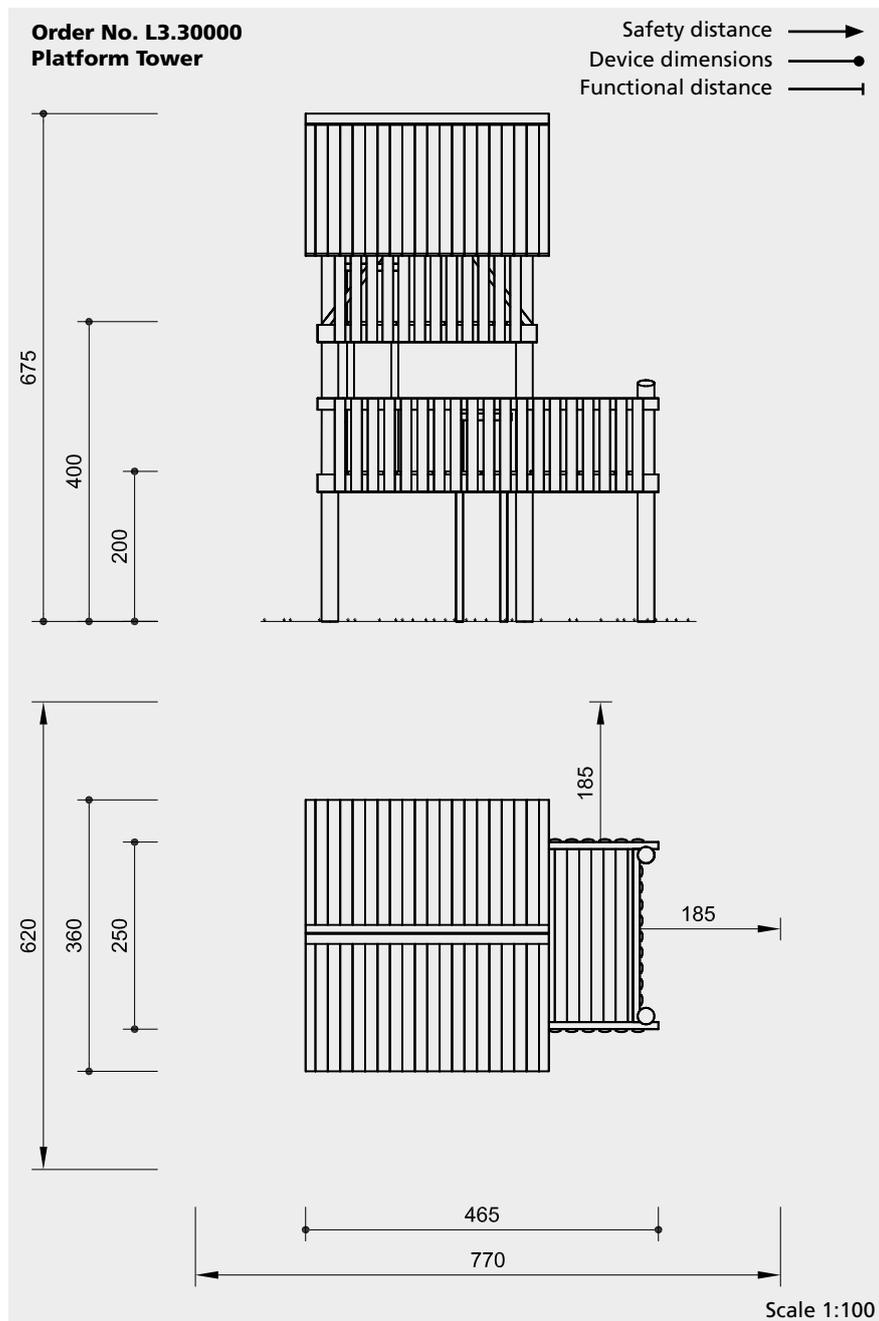

Safety check according to DIN EN 1176

Components

- 6 Posts with steel feet
- 1 Platform with closed barrier
- 1 Platform enclosed up to the roof
- 2 Double ladders inside
- 8 Roof sections made of tongue and groove boarding

Installation information

Surfacing requirements corresponding to a fall height of ≤ 2.00 m (please refer to price list for more detailed information)

Foundations

Stand posts

6 items 110 x 110 x 60 cm
Excavation depth 80 cm

Ladders

4 items 30 x 30 x 50 cm
Excavation depth 70 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.

Technical changes reserved.



L3.30000

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



Hardwood rungs

Climbing rungs made of hardwood (ash) \varnothing 4.2 cm, milled and mortised, secured against twisting, easy to grip and not cold for children to touch



Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

| | |
|---------------|-----------------------------|
| Total height | 6.75 m |
| Floor heights | 2.00 / 4.00 m |
| Floor size | 2.50 x 4.00 / 2.50 x 2.40 m |
| Weight | approx. 4000 kg |